



# SUBMITTAL INFORMATION

## Dismantling Joint - (FDJ-ExxZ-R style)



### RESTRAINED DISMANTLING JOINT - CLASS E FLANGE

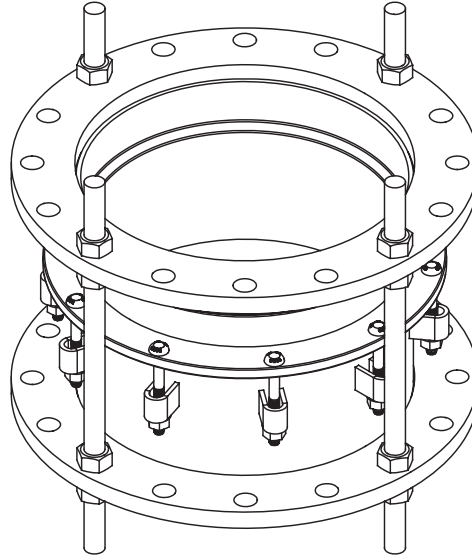

NOMINAL SIZE	CATALOG NUMBER	NOMINAL LENGTH	MINIMUM LENGTH	MAXIMUM LENGTH	RESTRAINT RODS		APPROX. WEIGHT	✓ SUBMITTED ITEM(S)
					NUMBER	SIZE		
3"	FDJ-E3Z-R	13-1/8"	11-1/2"	14-3/4"	2	5/8" x 24"	60	
4"	FDJ-E4Z-R	13-1/8"	11-1/2"	14-3/4"	2	5/8" x 24"	70	
6"	FDJ-E6Z-R	14"	12-1/2"	15-1/2"	2	3/4" x 24"	92	
8"	FDJ-E8Z-R	16-5/8"	14-7/8"	18-3/8"	4	3/4" x 26"	126	
10"	FDJ-E10Z-R	17"	15-1/4"	18-3/4"	3	7/8" x 26"	156	
12"	FDJ-E12Z-R	17-3/8"	15-7/8"	18-7/8"	4	7/8" x 26"	186	
14"	FDJ-E14Z-R	16-5/8"	15-1/8"	18-1/8"	4	1" x 26"	358	
16"	FDJ-E16Z-R	17"	15-1/2"	18-1/2"	4	1" x 30"	375	
18"	FDJ-E18Z-R	17-1/4"	15-3/4"	18-3/4"	4	1-1/8" x 30"	390	
20"	FDJ-E20Z-R	17-5/8"	16-1/8"	19-1/8"	6	1-1/8" x 30"	608	
24"	FDJ-E24Z-R	18"	16-1/2"	19-1/2"	7	1-1/4" x 30"	660	
30"	FDJ-E30Z-R	18-7/8"	17-3/4"	20"	10	1-1/4" x 36"	1345	
36"	FDJ-E36Z-R	19-1/4"	18-1/4"	20-1/4"	10	1-1/2" x 36"	1350	
42"	FDJ-E42Z-R	18-3/4"	17"	20-1/2"	14	1-1/2" x 36"	2010	
48"	FDJ-E48Z-R	20-5/8"	19"	22-1/4"	16	1-1/2" x 36"	2300	

### FEATURES

- Flange - AWWA Class E flange, drilling per ANSI/AWWA C110/A21, ANSI B16.5 150 lb
- Flange and adjusting pipe - A36 carbon steel
- Gaskets - SBR rubber per ASTM D2000
- Bolts and Nuts - Type 316 stainless steel per ASTM A193 and A194
- Tie Rods - Type 316 stainless steel per ASTM A193 and A194
- Finish - Fusion-bonded epoxy coating
- Rated for 275 psi working pressure

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

02/27/24

Submitted By: