



SUBMITTAL INFORMATION

Dismantling Joint - (FDJQ-DxxQ style)



316 STAINLESS STEEL DISMANTLING JOINT - CLASS D FLANGE

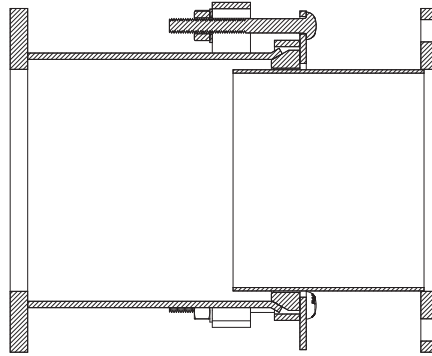

NOMINAL SIZE (IN.)	CATALOG NUMBER	NOMINAL LENGTH (IN.)	MINIMUM LENGTH (IN.)	MAXIMUM LENGTH (IN.)	APPROX WEIGHT (LBS.)	✓ SUBMITTED ITEM(S)
4	FDJQ-D4Q	12-1/8	10-1/2	13-3/4	59	
6	FDJQ-D6Q	12-3/4	11-1/4	14-1/4	76	
8	FDJQ-D8Q	15	13-1/4	16-3/4	78	
10	FDJQ-D10Q	15-1/4	13-1/2	17	101	
12	FDJQ-D12Q	15-1/2	14	17	143	
14	FDJQ-D14Q	14-3/4	13-1/4	16-1/4	192	
16	FDJQ-D16Q	15	13-1/2	16-1/2	249	

FEATURES

- Flange - AWWA Class D flange, drilling per ANSI/AWWA C110/A21, ANSI B16.5 150 lb.
- Flange and adjusting pipe - Type 316 stainless steel per ASTM A240
- Gaskets - SBR rubber per ASTM D2000
- Bolts and nuts - Type 316 stainless steel per ASTM A193 and ASTM A194, Grade B8M
- All welded components are fully passivated for corrosion resistance
- Certified to ANSI/NSF 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

02/21/25

Submitted By: