



SUBMITTAL INFORMATION

Steel Tapping Sleeve - (FTS-xxxx-TAP style)



STEEL TAPPING SLEEVE - 16" TO 24"

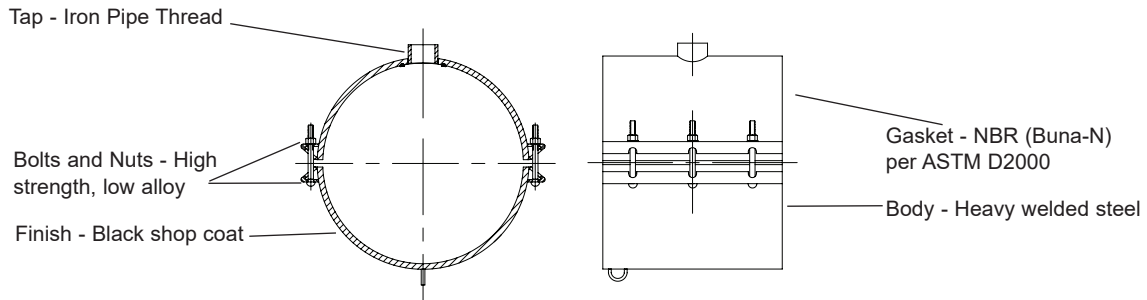

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	BY	OUTLET SIZE	SLEEVE NUMBER*	✓SUBMITTED ITEM(S)
16"-18"	17.33-17.87		3/4" - IP3	FTS-1787-TAP	
	1" - IP4		FTS-1843-TAP		
	1-1/2" - IP6		FTS-1903-TAP		
	2" - IP7		FTS-1945-TAP		
	3" - IP9		FTS-2001-TAP		
	4" - IP11				
18"-20"	19.88-20.48		3/4" - IP3	FTS-2048-TAP	
	1" - IP4		FTS-2092-TAP		
	1-1/2" - IP6		FTS-2157-TAP		
	2" - IP7		FTS-2215-TAP		
	3" - IP9		FTS-2281-TAP		
	4" - IP11				
20"-24"	22.78-23.45		3/4" - IP3	FTS-2345-TAP	
	1" - IP4		FTS-2416-TAP		
	1-1/2" - IP6		FTS-2485-TAP		
	2" - IP7		FTS-2552-TAP		
	3" - IP9				
	4" - IP11				
24"	25.71-26.41		3/4" - IP3	FTS-2641-TAP	
	1" - IP4		FTS-2725-TAP		
	1-1/2" - IP6		FTS-2796-TAP		
	2" - IP7		FTS-2884-TAP		
	3" - IP9				
	4" - IP11				

*To Order: Add outlet size to sleeve number. Example: A 3" outlet on 24" ductile iron pipe would be FTS-2641-IP9.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield.
- Bolts and nuts are made of high strength, low alloy per ASTM A242 and AWWA C111.
- Ring style gasket is NBR (Buna-N) per ASTM D2000
- Rated for 250 psi up to 24" outlets. 30"-36" outlets rated for 200 psi. Ratings not to exceed the rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

06/01/22

Submitted By: