



SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve 30" - 36" - (FTSAS-xxxx-x-MJ style)



TAPPING SLEEVE WITH MECHANICAL JOINT OUTLET

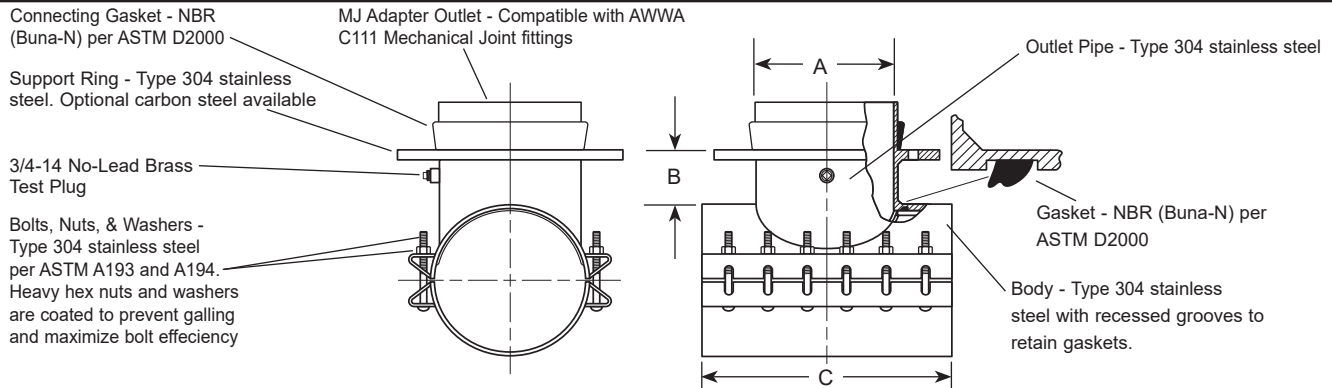

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	OUTLET SIZE CODE	NOMINAL DIMENSIONS-INCHES			MIN. NO. OF BOLTS	APPROX. WT. LBS.	*SLEEVE NUMBER	✓ SUBMITTED ITEM(S)
			A	B	C				
30"	29.78-30.48 30.48-31.18 31.52-32.22 31.80-32.50 32.30-33.00 32.40-33.10 33.10-33.80	3	3-1/4	5-3/16	16	10	171	FTSAS-3048-x-MJ FTSAS-3118-x-MJ FTSAS-3222-x-MJ FTSAS-3250-x-MJ FTSAS-3300-x-MJ FTSAS-3310-x-MJ FTSAS-3380-x-MJ	
		4	4-1/4	5-3/16	16	10	172		
		6	6-13/32	5-1/2	16	10	180		
		8	8-13/32	5-5/8	16	10	190		
		10	10-27/64	6-1/8	20	12	238		
		12	12-27/64	6-1/4	24	14	325		
		14	14	6-1/4	24	14	350		
		16	16	6-1/4	32	20	377		
		18	18	6-1/4	36	24	388		
		20	20	6-1/4	40	24	470		
36"	34.40-35.10 35.10-35.80 35.80-36.50 37.60-38.30 38.00-38.70 38.70-39.40	24	24	6-1/4	48	28	650	FTSAS-3510-x-MJ FTSAS-3580-x-MJ FTSAS-3650-x-MJ FTSAS-3830-x-MJ FTSAS-3870-x-MJ FTSAS-3940-x-MJ	
		3	3-1/4	5-3/16	16	10	188		
		4	4-1/4	5-3/16	16	10	190		
		6	6-13/32	5-1/2	16	10	215		
		8	8-13/32	5-5/8	20	10	220		
		10	10-27/64	6-1/8	20	12	260		
		12	12-27/64	6-1/4	24	14	340		
		14	14	6-1/4	24	14	370		
		16	16	6-1/4	32	20	450		
		18	18	6-1/4	36	24	470		
		20	20	6-1/4	40	24	580		
		24	24	6-1/4	48	28	750		

* The complete FTSAS catalog number for a 30" pipe (32.00 O.D.) with a 16" stainless steel outlet is FTSAS-3222-16-MJ. For carbon steel outlet, add "A" to the catalog number. Example: FTSAS-3222-16A-MJ.

Note: A 1" undersize cutter is required for flanges 14" and larger. Oversize outlets are available by special request.

FEATURES

- Body, straps and UNC threaded bolts are made of type 304 stainless steel. Support ring can be either type 304 stainless steel or ASTM A36 carbon steel. All welds are fully passivated for corrosion resistance.
- Outlet and connecting gaskets are NBR (Buna-N) per ASTM D2000
- Other sizes and ranges available. Contact your Ford Meter Box® representative for details.
- Removable bolts
- Certified to ANSI/NSF 61
- Rated for up to 250 psi. Rating not to exceed the pressure rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

08/08/22

Submitted By: