



SUBMITTAL INFORMATION

Steel Tapping Sleeve - (FTSC-xxxx-TAP style)



STEEL TAPPING SLEEVE - 30" TO 54"

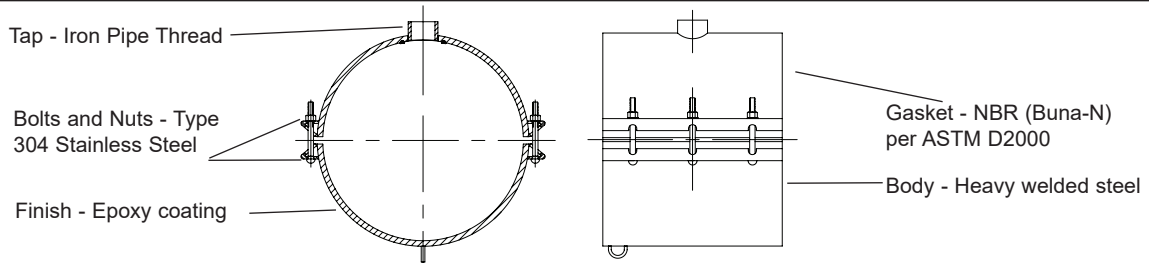

NOM. PIPE SIZE	SLEEVE O.D. RANGE (In.)	BY	OUTLET SIZE	SLEEVE NUMBER*	✓ SUBMITTED ITEM(S)
30"	29.78-30.48 30.48-31.18 31.52-32.22		3/4" - IP3	FTSC-3048-TAP FTSC-3118-TAP FTSC-3222-TAP	
			1" - IP4		
			1-1/2" - IP6		
			2" - IP7		
			3" - IP9		
36"	35.50-36.20 37.60-38.30 38.00-38.70 38.70-39.40		4" - IP11	FTSC-3620-TAP FTSC-3830-TAP FTSC-3870-TAP FTSC-3940-TAP	
			3/4" - IP3		
			1" - IP4		
			1-1/2" - IP6		
			2" - IP7		
42"	41.70-42.40 42.40-43.10 43.10-43.80 43.90-44.60 44.60-45.30 45.00-45.70		3" - IP9	FTSC-4240-TAP FTSC-4310-TAP FTSC-4380-TAP FTSC-4460-TAP FTSC-4530-TAP FTSC-4570-TAP	
			4" - IP11		
			3/4" - IP3		
			1" - IP4		
			1-1/2" - IP6		
48"	50.20-50.90 50.90-51.60 51.60-52.30		2" - IP7	FTSC-5090-TAP FTSC-5160-TAP FTSC-5230-TAP	
			3" - IP9		
			4" - IP11		
			3/4" - IP3		
			1" - IP4		
54"	57.20-57.90		1-1/2" - IP6	FTSC-5790-TAP	
			2" - IP7		
			3" - IP9		
			4" - IP11		
			3/4" - IP3		

*To Order: Add outlet size to sleeves number. Example: A 3" outlet on 48" ductile iron pipe would be FTSC-5090-IP9

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Bolts and nuts are made of type 304 stainless steel per ASTM A193 and A194
- Ring style gasket is NBR (Buna-N) per ASTM D2000
- Rated for 250 psi up to 24" outlets. 30"-36" outlets rated for 200 psi. Ratings not to exceed the rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

06/01/22

Submitted By: