



SUBMITTAL INFORMATION

Steel Tapping Sleeve - (FTSC-xxxx-xx-MJ-U100 style)



STEEL TAPPING SLEEVE - EPOXY COATED WITH 304 STAINLESS HARDWARE WITH MECHANICAL JOINT OUTLET

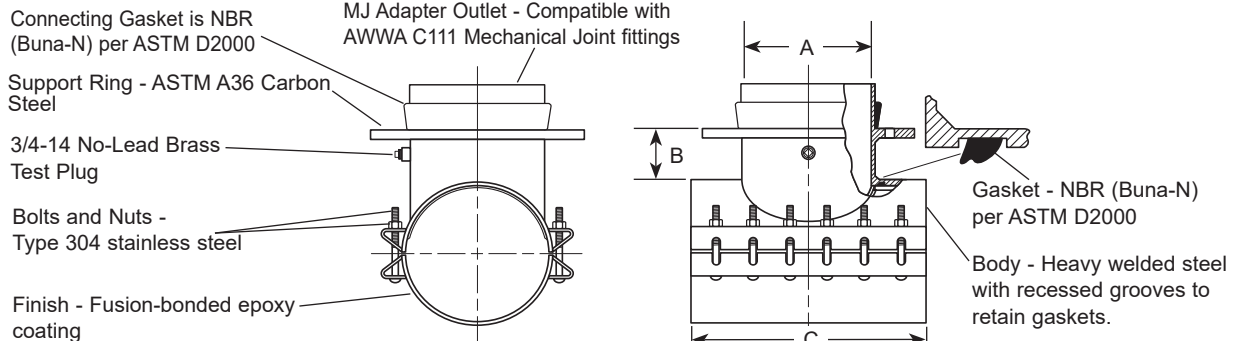

NOM. PIPE SIZE (IN.)	SLEEVE O.D. RANGE (IN.)	By	OUTLET SIZE CODE*	NOMINAL DIMENSIONS - INCHES			MIN. No. OF BOLTS	APPROX. WT. LBS.	CATALOG NUMBER*	✓ SUBMITTED ITEM(S)
				A	B	C				
16-18	17.33-17.87 17.88-18.43 18.46-19.03 18.87-19.45 19.41-20.01		4	4-1/4	5-3/16	12	6	105	FTSC-1787-xx-MJ-U100	
			6	6-13/32	5-3/16	12	6	116	**FTSC-1843-xx-MJ-U100	
			8	8-13/32	5-3/16	16	8	162	**FTSC-1903-xx-MJ-U100	
			10	10-27/64	5-3/16	20	10	215	FTSC-1945-xx-MJ-U100	
			12	12-27/64	5-3/16	24	12	240	FTSC-2001-xx-MJ-U100	
			16	16	6-1/4	32	16	270		
18-20	19.88-20.48 20.29-20.92 20.93-21.57 21.51-22.15 22.16-22.81		4	4-1/4	5-3/16	12	6	120	FTSC-2048-xx-MJ-U100	
			6	6-13/32	5-3/16	12	6	135	FTSC-2092-xx-MJ-U100	
			8	8-13/32	5-3/16	16	8	185	FTSC-2157-xx-MJ-U100	
			10	10-27/64	5-3/16	20	10	240	FTSC-2215-xx-MJ-U100	
			12	12-27/64	5-3/16	24	12	270	FTSC-2281-xx-MJ-U100	
			16	16	6-1/4	32	16	300		
20-24	22.78-23.45 23.46-24.16 24.15-24.85 24.82-25.52		4	4-1/4	5-3/16	12	6	131	FTSC-2345-xx-MJ-U100	
			6	6-13/32	5-3/16	12	6	142	FTSC-2416-xx-MJ-U100	
			8	8-13/32	5-3/16	16	8	196	FTSC-2485-xx-MJ-U100	
			10	10-27/64	5-3/16	20	10	257	FTSC-2552-xx-MJ-U100	
			12	12-27/64	5-3/16	24	12	283		
			16	16	6-1/4	32	16	313		
24	25.71-26.41 26.55-27.25 27.26-27.96 28.14-28.84		4	4-1/4	5-3/16	12	6	147	FTSC-2641-xx-MJ-U100	
			6	6-13/32	5-3/16	12	6	155	FTSC-2725-xx-MJ-U100	
			8	8-13/32	5-3/16	16	8	217	FTSC-2796-xx-MJ-U100	
			10	10-27/64	5-3/16	20	10	284	FTSC-2884-xx-MJ-U100	
			12	12-27/64	5-3/16	24	12	300		
			16	16	6-1/4	32	16	330		
30	29.78-30.48 30.48-31.18 31.52-32.22		4	4-1/4	5-3/16	12	6	152	FTSC-3048-xx-MJ-U100	
			6	6-13/32	5-3/16	12	6	160	FTSC-3118-xx-MJ-U100	
			8	8-13/32	5-3/16	16	8	222	FTSC-3222-xx-MJ-U100	
			10	10-27/64	5-3/16	20	10	290		
			12	12-27/64	5-3/16	24	12	308		
			16	16	6-1/4	32	16	338		

***To Order:** Add outlet size code to the sleeve number. Example: A 12" outlet on 24" cast iron pipe would be FTSC-2641-12-MJ-U100.

**** Size on size for this range is not available.**

Note: A 1" undersize cutter is required for outlets 14" and larger. Oversize outlets are available by special request.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Bolts and nuts are made of type 304 stainless steel per ASTM A193 and A194
- Fusion bonded epoxy coating on body
- Certified to ANSI/NSF 61
- Rated for up to 250 psi. Rating not to exceed the pressure rating of the pipe.
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

06/16/25

Submitted By: