



SUBMITTAL INFORMATION

Stainless Steel Insert Stiffeners - (*INSERT-xx-xxxx style*)



STAINLESS STEEL INSERT STIFFENERS FOR HIGH DENSITY POLYETHYLENE PIPE (HDPE)

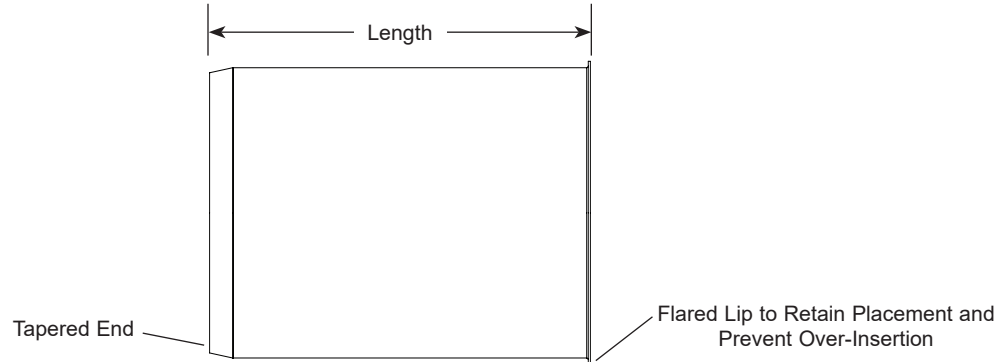

NOM. PIPE SIZE (IN.)	APPROX. WT. LBS.	LENGTH (IN.)	*CATALOG NUMBER	GAUGE / THICKNESS	✓ SUBMITTED ITEM(S)
3	1.7	6 - 8	INSERT-3-xxx	14 GA	
4	1.0		INSERT-4-xxx	20 GA	
6	2.1		INSERT-6-xxx	18 GA	
8	2.8	7-3/8	INSERT-8-xxx	18 GA	
10	3.5		INSERT-10-xxxx	18 GA	
12	4.1		INSERT-12-xxxx	18 GA	
14	5.7		INSERT-14-xxxx	16 GA	
16	6.5		INSERT-16-xxxx	16 GA	
18	7.4		INSERT-18-xxxx	16 GA	
20	8.2		INSERT-20-xxxx	16 GA	
24	9.6		INSERT-24-xxxx	16 GA	
26	16.6		INSERT-26-xxxx	12 GA	
28	18.4		INSERT-28-xxxx	12 GA	
30	45.0	7	INSERT-30-xxxx	1/4"	
36	73.0	7	INSERT-36-xxxx	3/8"	

*When ordering, the pipe inside diameter is required. For example, when ordering for an 8" pipe with an I.D. of 7.305", the part number is INSERT-8-731.

FEATURES

- Insert stiffeners are solid 304 stainless steel (ASTM A240)
Optional 316 stainless steel available. Add "-Q" to the end of the catalog number
- Flared to retain placement within the service line
- Tapered end to provide easy installation
- Chemically passivated to restore original corrosion resistance
- 3" and 4" design may be solid or wedged

Note: Consult pipe or tubing manufacturer for specific installation requirements.

Ford recommends using stainless steel insert stiffeners when using HDPE with certain products

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

10/07/25

Submitted By: