



# SUBMITTAL INFORMATION

## Angle Key Meter Valves - (KV63-xxxW-U-AWT-NL style)



### ULTRA-TITE FOR POLYETHYLENE PIPE (SIDR7 PEP) INLET BY METER SWIVEL NUT OUTLET

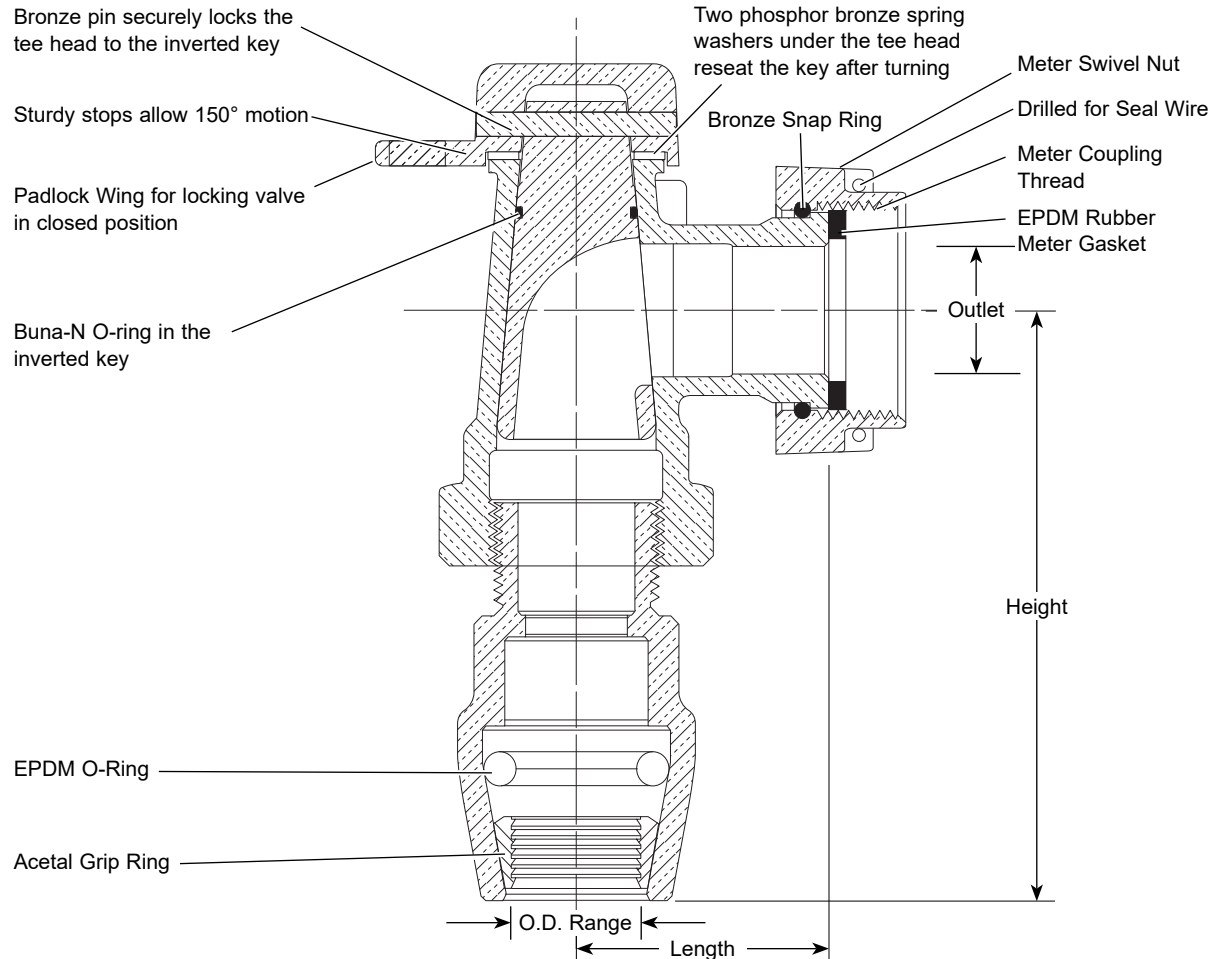

| VALVE SIZE | SERVICE LINE INLET |               | METER SIZE<br>OUTLET | LENGTH   | HEIGHT   | APPROX.<br>WT. LBS | PART<br>NUMBER     | ✓ SUBMITTED<br>ITEM(S) |
|------------|--------------------|---------------|----------------------|----------|----------|--------------------|--------------------|------------------------|
|            | SIZE               | O.D. RANGE    |                      |          |          |                    |                    |                        |
| 3/4"       | 3/4"               | 1.045 - 1.110 | 5/8" x 3/4" & 3/4"   | 1-43/64" | 3-31/32" | 1.8                | KV63-332W-U-AWT-NL |                        |
| 1"         | 1"                 | 1.329 - 1.399 | 1"                   | 1-15/16" | 4-1/2"   | 2.7                | KV63-444W-U-AWT-NL |                        |

### FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Padlock wing for locking the valve in a closed position
- Meets 100 PSI working pressure requirement of AWWA Standard C800

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

10/11/16

Submitted By: