



# SUBMITTAL INFORMATION

## Lead-Pak Coupling - (Qx4-xx-G-NL style)



### LEAD PIPE TO GRIP JOINT FOR COPPER OR PLASTIC TUBING (CTS)

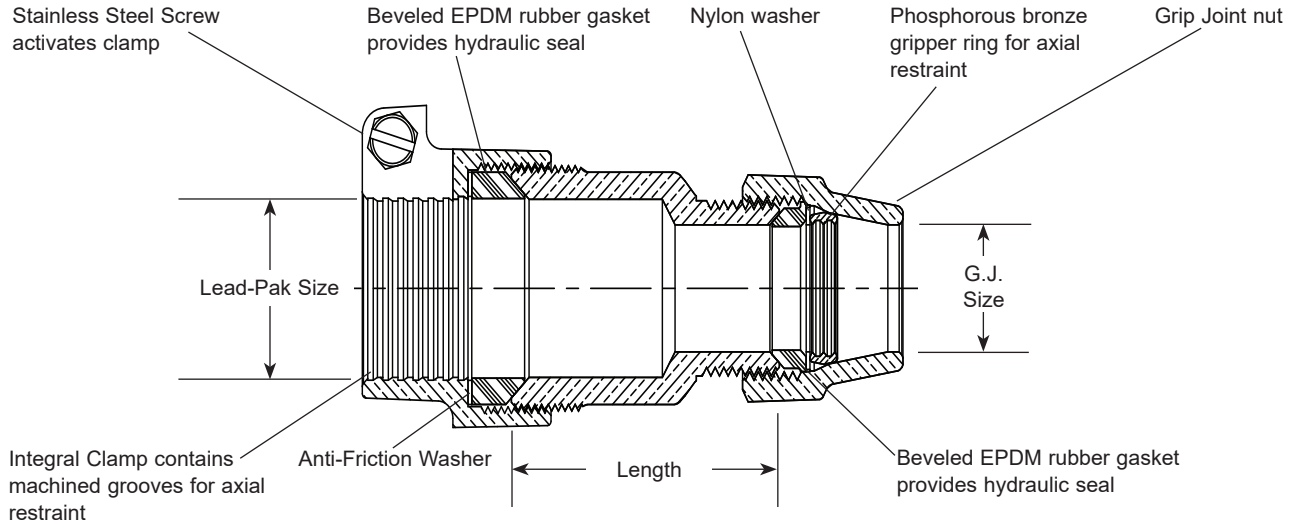

Due to design variations related to sizing, items may differ from images above.

LEAD-PAK SIZE	G.J. SIZE	LENGTH	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
3/4" Extra Strong Lead (XS)	3/4"	2-7/32"	1.3	Q24-33-G-NL	
1" Extra Strong Lead (XS)	1"	2-3/8"	1.9	Q24-44-G-NL	
5/8" Extra Strong Lead (XS)	3/4"	2-1/8"	1.0	Q24-23-G-NL	
1" Double Extra Strong (XXS)	3/4"	2-3/8"	1.7	Q34-43-G-NL	
5/8" Strong Lead (S) or 1/2" Double Extra Strong (XXS)	3/4"	2-1/8"	1.1	Q14-23-Q34-13-G-NL	
3/4" Strong Lead (S) or 5/8" Double Extra Strong (XXS)	3/4"	2-5/16"	1.1	Q14-33-Q34-23-G-NL	
1" Strong Lead (S)	1"	2-3/8"	2.0	Q14-44-G-NL	

**Note:** Ford recommends Insert Stiffeners when using plastic pipe or tubing.

### FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- To attach copper, iron, plastic or PVC to an existing lead service line
- Grip joint couplings are not compatible with lead pipe
- Sleeve design provides hexagonal wrench flats for proper installation

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

03/18/22

Submitted By: