



# SUBMITTAL INFORMATION

## No-Contact Lead-Pak Coupling - (Qx4-xx-NC-NL style)



### NO-CONTACT LEAD PIPE PACK JOINT TO PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) (PATENT 10,371,296)

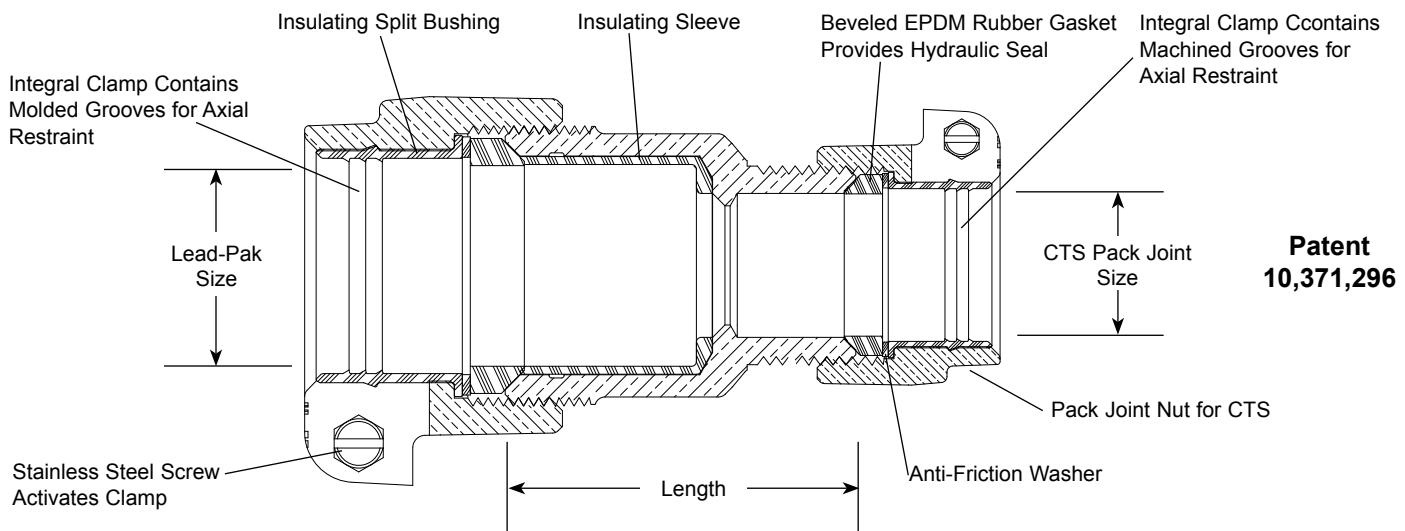

Due to design variations related to sizing, items may differ from images above.

LEAD-PAK SIZE	CTS PJ SIZE	LENGTH	APPROX. Wt. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
5/8" dbl. extra strong lead (xxs) or 3/4" strong lead (s)	3/4"	2-11/64"	1.5	Q14-33-Q34-23-NC-NL	
3/4" extra strong lead (xs)	3/4"	2-7/32"	1.3	Q24-33-NC-NL	
3/4" extra strong lead (xs)	1"	2-29/64"	1.5	Q24-34-NC-NL	
1" extra strong lead (xs)	1"	2-1/2"	2.1	Q24-44-NC-NL	

### FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- To attach copper or plastic tubing (CTS) to an existing lead service line
- Permanently installed plastic gripper ring and sleeve liner made of acetyl plastic (POM)
- Prevents direct contact of the lead plumbing line with other metallic water system components which can mitigate the possibility of galvanic corrosion

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
[www.fordmeterbox.com](http://www.fordmeterbox.com)

Submitted By:

05/01/20