


SUBMITTAL INFORMATION

Brass Saddles For C900 PVC - (S912-xxx style)




BRASS SADDLES WITH IP TAPS FOR C900 PVC PIPE

Brass alloy body and strap,
meeting ASTM B62, ASTM B584
and AWWA C800

EPDM Rubber O-Ring gasket

Silicon Bronze Bolts and Nuts

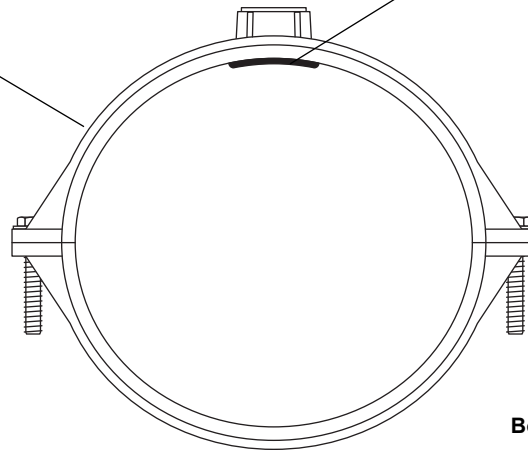

**2-Piece
Bolted Design**

PVC PIPE SIZE	ACTUAL O.D. (IN.)	TAP SIZE	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
4"	4.80	3/4"	2.9	S912-403	
		1"	2.8	S912-404	
		1-1/2"	7.5	S912-406	
		2"	7.1	S912-407	
6"	6.90	3/4"	4.6	S912-603	
		1"	4.5	S912-604	
		1-1/2"	9.1	S912-606	
		2"	8.5	S912-607	
8"	9.05	3/4"	5.4	S912-803	
		1"	5.3	S912-804	
		1-1/2"	12.6	S912-806	
		2"	11.9	S912-807	
10"	11.10	1-1/2"	12.9	S912-1006	
		2"	12.6	S912-1007	
12"	13.20	1-1/2"	14.3	S912-1206	
		2"	14.3	S912-1207	

FEATURES

- All brass conforms to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS No C83600 - 85-5-5-5)
- These saddles conform to the design and sizing requirements held by the Uni-Bell Handbook and the AWWA manual M23 for use on PVC pipe.
- O-ring gasket is EPDM rubber per ASTM D2000.
- 150 psi working pressure rating



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

06/09/20

Submitted By: