


SUBMITTAL INFORMATION





PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET BY TWO MALE IRON PIPE THREAD OUTLETS, ASSEMBLED WATERTIGHT

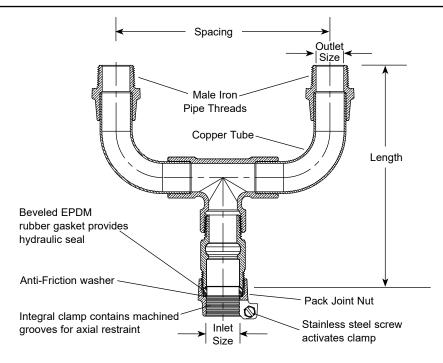

DESCRIPTION		LENGTH	SPACING	APPROX.	Part	✓ SUBMITTED
PACK JOINT INLET	MIP OUTLET	LENGIH	SPACING	Wt. LBS	Number	ITEM(S)
1"	Two - 1"	7-53/64"	7-1/2	3.5	U48-44-FAB-AWT-NL	

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Constructed with Type K copper conforming to ASTM B75 or B88, UNS C12200
- Ends are integral or secured with adhesive to prevent unintentional disassembly

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167 www.fordmeterbox.com

07/01/20

Submitted By: