



SUBMITTAL INFORMATION

Uni-Flange® Restraint (*UFR1300-P-x-X-I style*)



**SERIES 1300-P 4" - 12" RESTRAINT DEVICE (WITH 304 STAINLESS STEEL HARDWARE)
FOR SEWER PIPE**

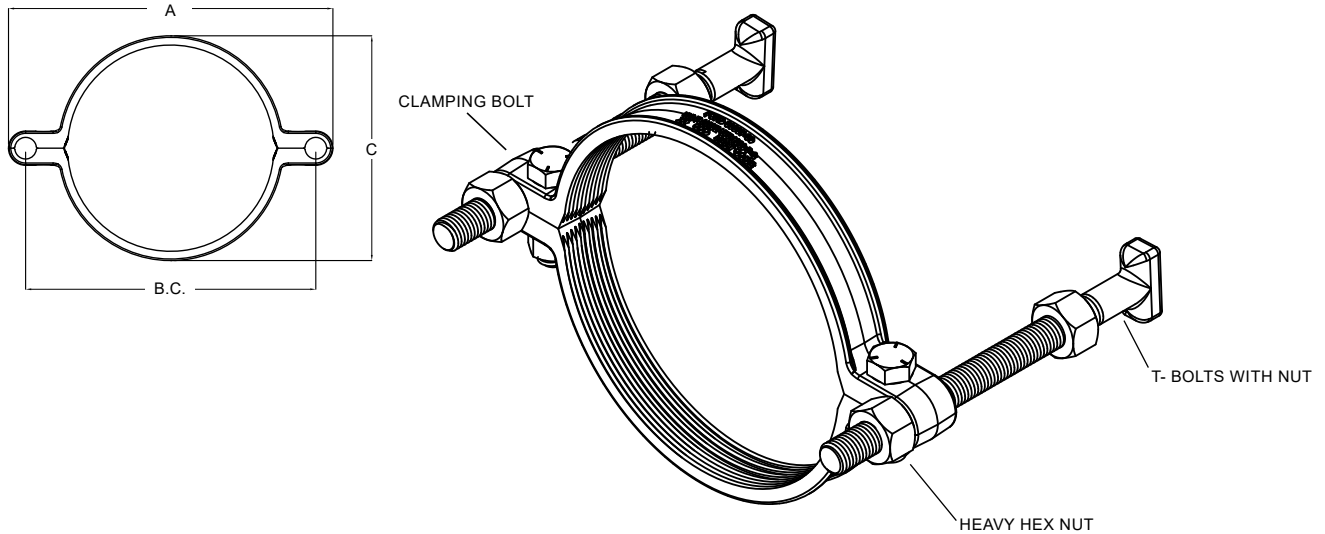

NOM PIPE SIZE	SEWER PIPE OD STYLE 1300-P		A	B.C.	C	RESTRAINING BOLTS		CLAMPING BOLTS		APPROX. WT. LBS.	✓ SUBMITTED ITEMS
	OD (In.)	CATALOG No.				No. D	SIZE E	No. F	SIZE G		
4"	4.22	UFR1300-P-4-X-I	8-57/64"	7-1/2"	4-59/64"	2	3/4" x 7"	2	5/8" x 2-1/4"	5.5	
6"	6.28	UFR1300-P-6-X-I	10-57/64"	9-1/2"	6-63/64"	2	3/4" x 7"	2	5/8" x 2-1/4"	5.9	
8"	8.40	UFR1300-P-8-X-I	13-9/64"	11-3/4"	9-3/32"	2	3/4" x 7"	2	5/8" x 2-1/4"	6.3	
10"	10.50	UFR1300-P-10-X-I	15-23/64"	14"	11-29/64"	2	3/4" x 7"	2	5/8" x 2-1/4"	8.3	
12"	12.50	UFR1300-P-12-X-I	18"	16-1/4"	13-29/64"	2	3/4" x 7"	2	5/8" x 2-1/4"	9.5	

FEATURES

- 4" - 12" sizes: cast ductile iron per ASTM A536 grade 65-45-12, black e-coat epoxy
- Clamping bolts and nuts - type 304 stainless steel per ASTM A193 and A194
- 360° contact and support of the pipe wall
- T-bolts and nuts (included) are type 304 stainless steel per ASTM A193 and A194
- Rated at 50 psi with a 2:1 safety factor

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



05/13/20

Submitted By: