



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1300-P-xx-RB-U style)



SERIES 1300-P 15" - 27" RESTRAINT DEVICE FOR SDR35 SEWER PIPE

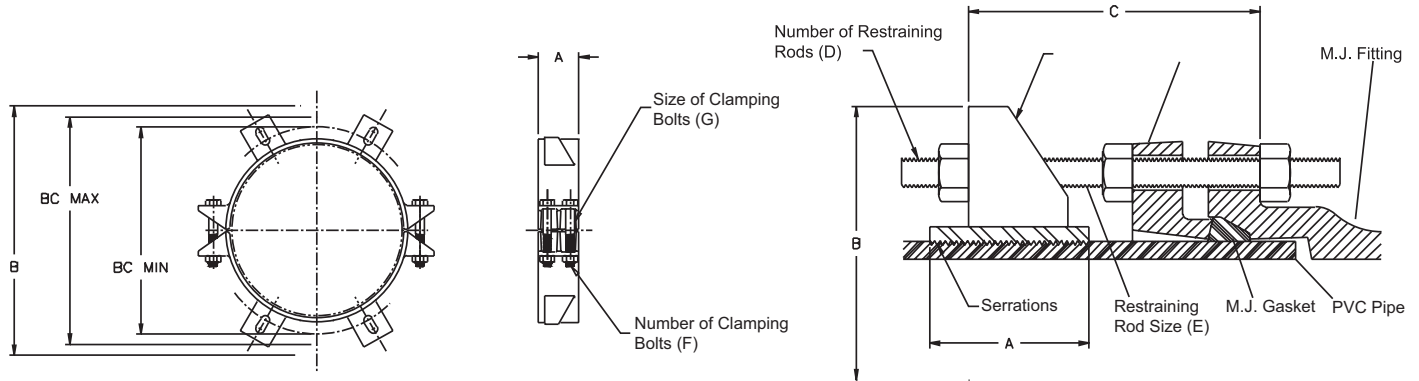

NOM PIPE SIZE (IN.)	STYLE 1300-P		A (IN.)	B APPROX (IN.)	C MAX (IN.)	RESTRAINING RODS		CLAMPING BOLTS		BC MIN (IN.)	BC MAX (IN.)	APPROX. WT. LBS.	✓SUBMITTED ITEM(S)
	OD (IN.)	CATALOG No.				QTY. D	SIZE E (IN.)	QTY. F	SIZE G (IN.)				
15	15.30	UFR1300-P-15-RB-U	4	22-1/2	15	4	3/4 x 17	4	7/8 x 5	18.50	20.50	50.0	
18	18.70	UFR1300-P-18-RB-U	4	26-3/16	15	4	3/4 x 17	4	7/8 x 7	21.88	23.88	62.0	
21	22.05	UFR1300-P-21-RB-U	4	28-13/16	22	4	3/4 x 24	4	7/8 x 7	24.56	26.56	68.5	
24	24.80	UFR1300-P-24-RB-U	4	32-3/16	22	4	3/4 x 24	4	7/8 x 7	27.94	29.94	76.5	
27	27.95	UFR1300-P-27-RB-U	4	35-3/8	22	4	3/4 x 24	4	7/8 x 7	31.09	33.09	85.0	

*Contact factory for larger sizes. Exact pipe & Bell OD are required.

FEATURES

- Carbon steel per ASTM A36
- Finish - Shop coat - NSF61 Certified
- 360° contact and support of the pipe wall
- Rods (included) - High strength, low alloy steel per ANSI / AWWA C111 / A21.11 with blue fluorocarbon coating
- 50 psi rated working pressure with a 2:1 safety factor
- Side clamping bolts and nuts - Grade 5, zinc-plated

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies. t



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



04/24/25

Submitted By: