




SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1360-P-xx-xxxx-U style)




SERIES 1360-P 15"-27" RESTRAINT DEVICE FOR SEWER PIPE PRESSURE FITTINGS

1360 Back-Up Ring

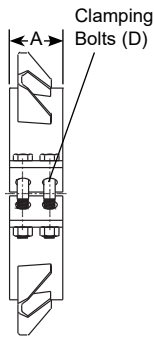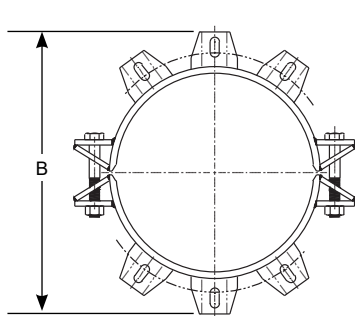

1360 Assembly

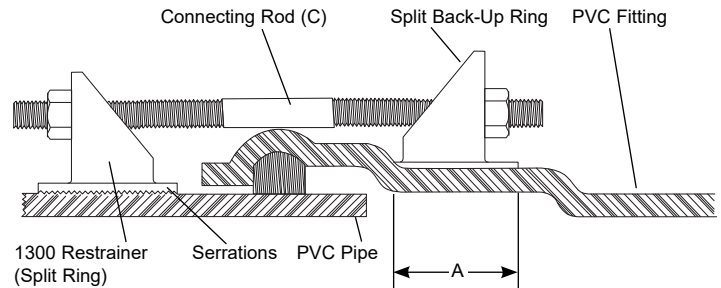

NOM PIPE SIZE	PVC PIPE WITH DI PIPE OD STYLE 1360-P		A	*B APPROX	CONNECTING RODS QUANTITY & SIZE (C)	SIDE CLAMPING BOLT QUANTITY & SIZE (D)		✓ SUBMITTED ITEMS
	OD	CATALOG No.				RESTRAINT	BACK-UP RING	
15"	15.30	UFR1360-P-15-xxxx-U	4"	22-7/16"	(4) 3/4" x 24"	(4) 7/8" x 5"	(4) 7/8" x 7"	
18"	18.70	UFR1360-P-18-xxxx-U	4"	26-3/4"	(4) 3/4" x 30"	(4) 7/8" x 7"	(4) 7/8" x 7"	
21"	22.05	UFR1360-P-21-xxxx-U	4"	31-1/2"	(4) 3/4" x 30"	(4) 7/8" x 7"	(4) 7/8" x 7"	
24"	24.80	UFR1360-P-24-xxxx-U	4"	34-1/4"	(4) 3/4" x 30"	(4) 7/8" x 7"	(4) 7/8" x 7"	
27"	27.95	UFR1360-P-27-xxxx-U	4"	37-1/4"	(4) 3/4" x 36"	(4) 7/8" x 7"	(4) 7/8" x 7"	

*These are approximate dimensions. Dimensions are dependent on the bell run O.D.

Note: Bell run O.D. and pipe manufacturer are required when ordering.

Note: Larger sizes are available. Please contact factory for more information.

Supply bell run outside diameter with order
for units 15" and larger.



FEATURES

- 15"-27" Split ring restraint cast of 65-45-12 grade ductile iron per ASTM A536 or fabricated from carbon steel per ASTM A36 - Armorguard e-coat applied epoxy
- Split back-up ring fabricated of carbon steel per ASTM A36 - black alkyd enamel shop coat (NSF 61 approved)
- Rods (included) - High strength, low alloy steel per ANSI/AWWA C111/A21.11
- Rated at full-rated pressure of any class PVC pipe, minimum 2:1 safety factor
- Fits standard C907 fittings

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



04/05/18

Submitted By: