



# SUBMITTAL INFORMATION

## Uni-Flange® Restraint - (UFR1390-P-xx-RB-U style)




### SERIES 1390-P RESTRAINT HARNESS FOR SEWER PVC PIPE BELL AND SPIGOT JOINTS

#### 1300 SPLIT RESTRAINT

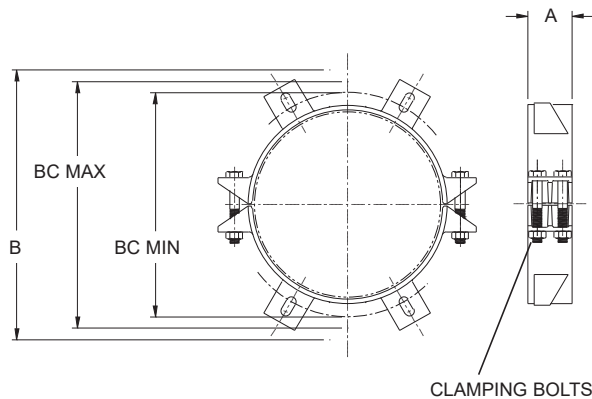

#### 1390 ASSEMBLY

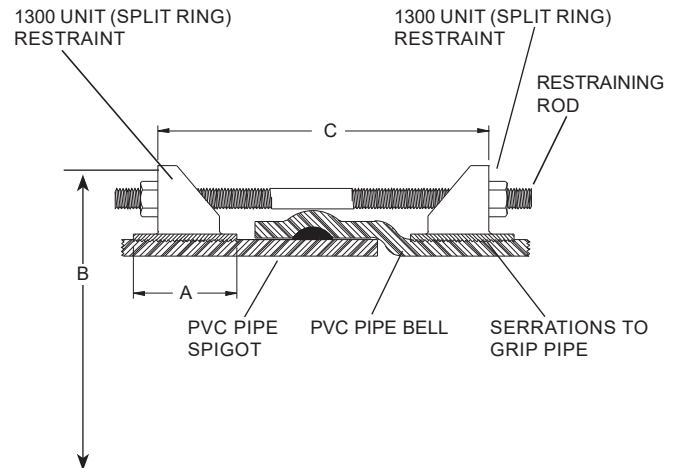

NOM PIPE SIZE	STYLE 1390-P		A	B APPROX	C MAX	RESTRAINING RODS		CLAMPING BOLTS PER GLAND		BC MIN	BC MAX	APPROX. WT. LBS.	✓ SUBMITTED ITEM(S)
	OD (IN.)	CATALOG NUMBER				QTY.	SIZE	QTY.	SIZE				
15"	15.30	UFR1390-P-15-RB-U	4"	22-1/2"	28"	4	3/4" x 30"	4	7/8" x 7"	18.50"	20.50"	100	
18"	18.70	UFR1390-P-18-RB-U	4"	26-3/16"	28"	4	3/4" x 30"	4	7/8" x 7"	21.88"	23.88"	124	
21"	22.05	UFR1390-P-21-RB-U	4"	28-13/16"	34"	4	3/4" x 36"	4	7/8" x 7"	24.56"	26.56"	137	
24"	24.80	UFR1390-P-24-RB-U	4"	32-3/16"	34"	4	3/4" x 36"	4	7/8" x 7"	27.94"	29.94"	153	
27"	27.95	UFR1390-P-27-RB-U	4"	35-3/8"	34"	4	3/4" x 36"	4	7/8" x 7"	31.09"	33.09"	170	

### FEATURES

- Carbon steel per ASTM A36
- Coating - Shop coat - NSF 61 approved
- Side clamping bolts and nuts - Grade 5, zinc-plated with blue fluorocarbon-coating
- 360° contact and support of the pipe wall
- Rods (included) - High strength, low alloy steel per ANSI/AWWA C111/A21.11 with blue fluorocarbon-coating
- 50 psi rated working pressure with a 2:1 safety factor

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



#### The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com



03/16/23

Submitted By: