


SUBMITTAL INFORMATION




Uni-Flange® Restraint - (UFR1400-DA-x-RB-XL style)



OVERSIZE WEDGE ACTION SERIES 1400-DA-XL RESTRAINT GLAND FOR CLASS C & D GREY IRON PIPE WITH ACCESSORIES AND BLUE FLUOROCARBON-COATED HARDWARE

Ductile iron wedge actuating screw, with the Auto-Tork break-away head design, ensures proper torque during installation.

Gland body is of high strength ductile iron per ASTM A536, Grade 65-45-12. Compatible with all mechanical joints conforming to ANSI/AWWA C111/A21.11.

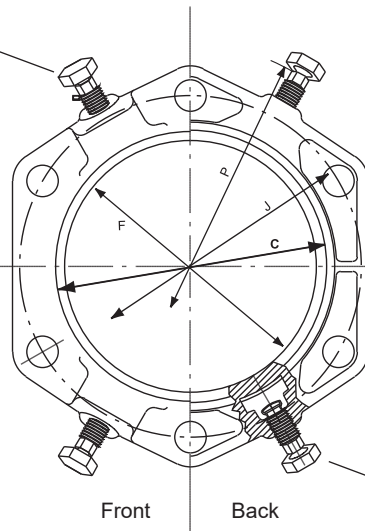

Wedges are ductile iron and heat treated to a hardness of 370 BHN minimum.

NOM. PIPE SIZE	O.D. (IN.)	CATALOG NUMBER	PRESSURE RATING (PSI)	NO. OF WEDGES	APPROX. WEIGHT (LBS.)	P* (IN.)	C (IN.)	D (IN.)	F (IN.)	M (IN.)	J (IN.)	SUBMITTED ITEM(S)
4	5.00	UFR1400-DA-4-RB-XL	250	2	7.0	10.0	5.92	2.65	5.10	0.88	7.50	
6	7.10	UFR1400-DA-6-RB-XL	250	3	10.5	12.1	8.02	2.65	7.20	0.88	9.50	
8	9.30	UFR1400-DA-8-RB-XL	250	4	14.0	14.3	10.17	2.65	9.40	1.10	11.75	
10	11.40	UFR1400-DA-10-RB-XL	250	6	23.0	16.3	12.22	2.75	11.50	1.10	14.00	
12	13.50	UFR1400-DA-12-RB-XL	250	8	28.0	18.4	14.32	2.75	13.60	1.10	16.25	

* Maximum O.D. of gland on pipe after wedges have been activated and break-away heads have been removed.

FEATURES

- Eliminates the need of costly and time consuming concrete thrust blocks and corrosion susceptible steel tie rods
- Auto-Tork wedge actuating screws assure proper installation
- Wedges are contoured to fit the pipe
- Set of blue fluorocarbon-coated high strength, low alloy t-bolts and nuts (AWWA C111)
- Color coded grey
- Gland, screws and wedges are black e-coated
- Mechanical joint gasket (AWWA C111)
- FM Approved (4"-12") and UL Listed (4"- 48")

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

07/24/25

Submitted By: