



# SUBMITTAL INFORMATION

## Uni-Flange® Split Joint Restraint - (UFR1405-DA-x-I style)



### WEDGE ACTION SERIES 1405-D SPLIT RESTRAINT GLAND FOR DUCTILE IRON PIPE WITH ACCESSORIES

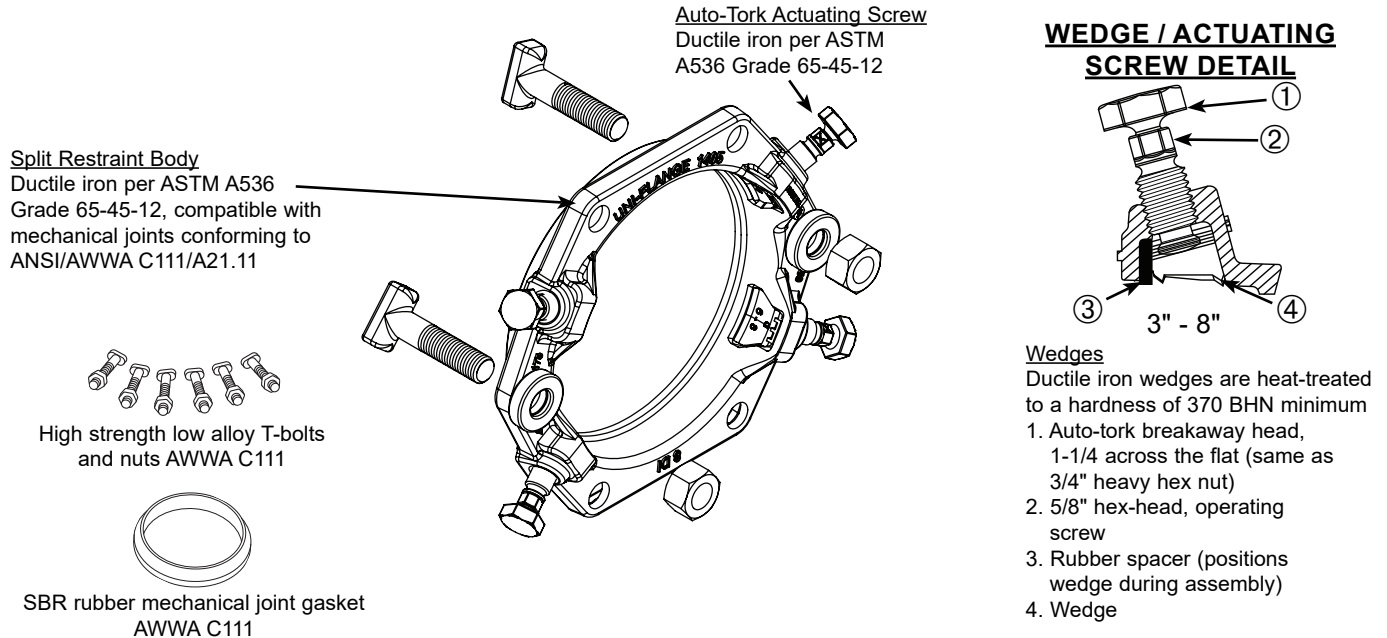

| NOM. PIPE SIZE | PIPE O.D. (IN.) | NO. OF BOLTS HOLES | NO. OF WEDGES | PRESSURE RATING (PSI) | *MAX. RESTRAINT O.D. | APPROX. WT. LBS. | CATALOG NUMBER | ✓ SUBMITTED ITEM(S) |
|----------------|-----------------|--------------------|---------------|-----------------------|----------------------|------------------|----------------|---------------------|
| 3"             | 3.96            | 4                  | 2             | 350                   | 9.1                  | 6.0              | UFR1405-DA-3-I |                     |
| 4"             | 4.80            | 4                  | 2             | 350                   | 10.0                 | 7.5              | UFR1405-DA-4-I |                     |
| 6"             | 6.90            | 6                  | 3             | 350                   | 12.1                 | 11.0             | UFR1405-DA-6-I |                     |
| 8"             | 9.05            | 6                  | 4             | 350                   | 14.0                 | 14.5             | UFR1405-DA-8-I |                     |

\* Maximum O.D. of gland on pipe after wedges have been activated and break-away heads have been removed.

## FEATURES

- Gland - Ductile iron per ASTM A536, grade 65-45-12
- Wedge actuating screws - Ductile iron per ASTM A536, grade 65-45-12
- Wedge - Ductile iron per ASTM A536 heat treated to hardness of 370 BHN minimum
- Connector - T-bolts and nuts: High strength, low alloy (AWWA C111)
- Connector plate - High strength ductile iron per ASTM A536, Grade 65-45-12
- Coating - Black e-coat epoxy
- SBR Rubber mechanical joint gasket (AWWA C111)
- 2:1 safety factor at rated working pressure; 3"- 8" - 350 PSI RWP

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

07/19/21

Submitted By: