


## SUBMITTAL INFORMATION





## WEDGE ACTION SERIES 2800-D RESTRAINT GLAND FOR DUCTILE IRON PIPE WITH ACCESSORIES

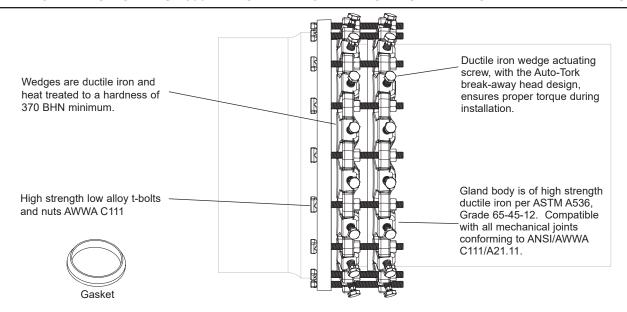

Nom. Pipe Size	O.D. (In.)	CATALOG NUMBER	PRESSURE RATING (PSI)	APPROX. WEIGHT (LBS.)	MAX RESTRAINT O.D.* (In.)	✓ SUBMITTED ITEM(S)
3	3.96	UFR2800-DA-3-U	500	17.0	9.06	
4	4.80	UFR2800-DA-4-U	500	23.0	10.0	
6	6.90	UFR2800-DA-6-U	500	35.0	12.1	
8	9.05	UFR2800-DA-8-U	500	43.0	14.3	
10	11.10	UFR2800-DA-10-U	500	63.0	16.3	
12	13.20	UFR2800-DA-12-U	500	83.0	18.4	
14	15.30	UFR2800-DA-14-U	450	114.0	20.9	
16	17.40	UFR2800-DA-16-U	450	128.0	23.0	
18	19.50	UFR2800-DA-18-U	350	162.0	25.8	
20	21.60	UFR2800-DA-20-U	350	180.0	27.9	
24	25.80	UFR2800-DA-24-U	350	214.0	32.1	

<sup>\*</sup> Maximum O.D. of gland on pipe after wedges have been activated and break-away heads have been removed.

## **FEATURES**

- Eliminates the need of costly and time consuming concrete thrust blocks and corrosion susceptible steel tie rods
- Auto-Tork wedge actuating screws assure proper installation
- · Wedges are contoured to fit the pipe
- · Set of high strength, low alloy t-bolts and nuts per AWWA C111
- SBR Mechanical joint gasket per AWWA C111
- · Gland, screws and wedges are black e-coated
- All sizes pressure tested to twice the listed pressure rating
- Restraining segments mechanically retained in pockets

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



## The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167 www.fordmeterbox.com

02/08/23

	nitte	