



SUBMITTAL INFORMATION

Ball Valve Branch Assembly - (UVB41-64W-xx-FP-AWT-Q-NL style)



QUICK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET BY
TWO FEMALE IRON PIPE THREAD OUTLETS, ASSEMBLED WATERTIGHT

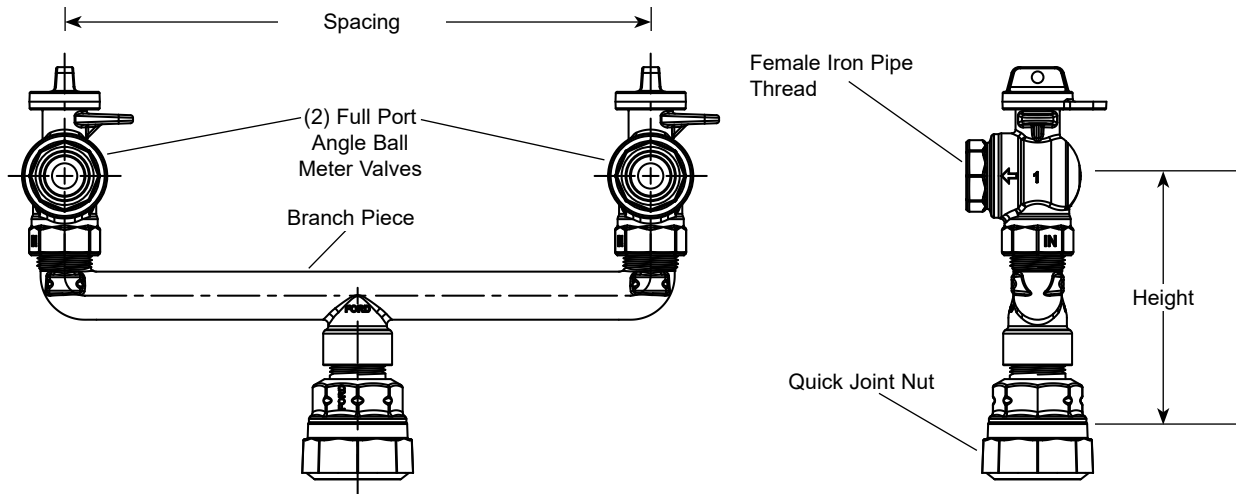

QJ INLET SIZE	FIP OUTLET SIZE	SPACING	HEIGHT	APPROX. WT. LBS.	COMPONENTS		ASSEMBLY CATALOG NUMBER	✓ SUBMITTED ITEM(S)
					BRANCH PIECE	VALVES (2)		
1-1/2"	1"	14"	6-1/2"	9.0	U18-44-14-NL	BA11-444W-NL	UVB41-64W-14-FP-AWT-Q-NL	
1-1/2"	1"	18"	6-1/2"	10.0	U18-44-18-NL	BA11-444W-NL	UVB41-64W-18-FP-AWT-Q-NL	

Note: Ford recommends using insert stiffeners with plastic pipe and tubing

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- All Branch Valve Assemblies have padlock wings
- Meets high pressure service line requirements of AWWA Standard C800

Optional: Full 360° tee-head rotation. Insert "R" into the part number

Example: UVB41-64WR-14-FP-AWT-Q-NL

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

06/21/21

This item is noncancelable and non-returnable.

Approved By: