



# SUBMITTAL INFORMATION

## 70 Series Coppersetter - (VB74-xxW-41-44-FP-G-NL style)




FULL PORT ANGLE BALL VALVE BY METER NUT (1" METER)

GRIP JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET BY DOUBLE PURPOSE UNION SWIVEL OUTLET

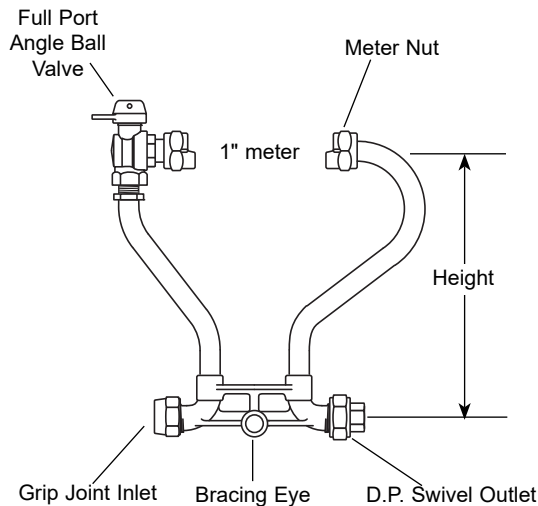

### Coppersetter Part Number

| HEIGHT (INCHES) | APPROX. Wt. LBS. | CATALOG NUMBER         | ✓ SUBMITTED ITEM(S) |
|-----------------|------------------|------------------------|---------------------|
| 10              | 7.5              | VB74-10W-41-44-FP-G-NL |                     |
| 12              | 7.6              | VB74-12W-41-44-FP-G-NL |                     |
| 15              | 7.9              | VB74-15W-41-44-FP-G-NL |                     |
| 18              | 8.2              | VB74-18W-41-44-FP-G-NL |                     |
| 21              | 9.7              | VB74-21W-41-44-FP-G-NL |                     |
| 24              | 10.1             | VB74-24W-41-44-FP-G-NL |                     |
| 27              | 10.4             | VB74-27W-41-44-FP-G-NL |                     |
| 30              | 10.7             | VB74-30W-41-44-FP-G-NL |                     |
| 33              | 11.0             | VB74-33W-41-44-FP-G-NL |                     |
| 36              | 11.3             | VB74-36W-41-44-FP-G-NL |                     |
| 39              | 11.6             | VB74-39W-41-44-FP-G-NL |                     |
| 42              | 11.9             | VB74-42W-41-44-FP-G-NL |                     |



### Service Line Size

| INLET         | OUTLET         |
|---------------|----------------|
| 1" (CTS) G.J. | 1" D.P. Swivel |

**Note:** Ford recommends using insert stiffeners with plastic pipe or tubing

### FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Copper conforms to ASTM B75 or B88, UNS C12200
- Saddle nuts hold the meter in place for tightening
- Bracing eye is standard on all 70 Series Coppersetters
- Tie bar is standard for 21" and taller Coppersetter heights (74 Series)
- Double Purpose Union Swivels will accommodate male iron pipe threads or flare copper
- 1-1/8" copper risers provide more flow capacity
- All Ford® Setters are assembled with lead-free solder
- Full 1" valve port

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

03/15/19

Submitted By: