



SUBMITTAL INFORMATION

74-84 Series Coppersetter - (VBB74-84W-41-44-FP-Q-NL style)



FULL PORT ANGLE BALL VALVE BY FULL PORT ANGLE BALL VALVE (1" METER)

QUICK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET
AND DOUBLE PURPOSE UNION SWIVEL OUTLET

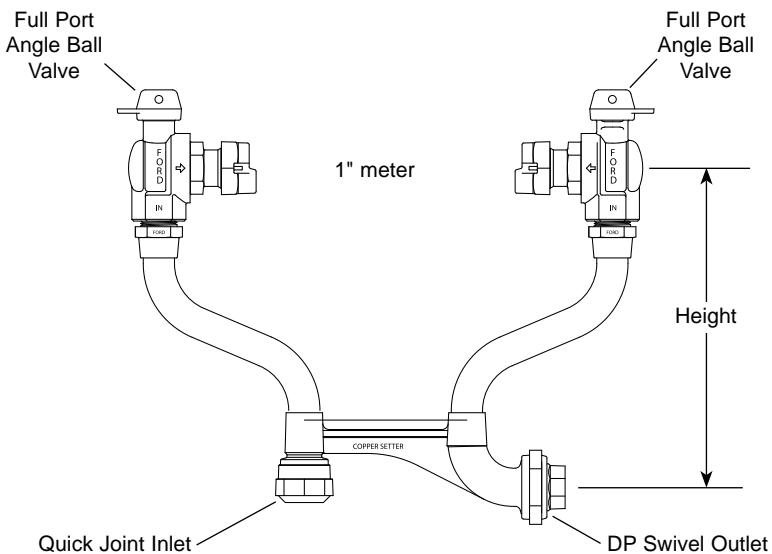

INLET	OUTLET	APPROX. WT. LBS.	APPROX. HEIGHT	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
1" (CTS) Q.J.	1" D.P. Swivel	10.6	10"	VBB74-84W-41-44-FP-Q-NL	

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Copper conforms to ASTM B88, UNS C12200.
- Saddle nuts hold the meter in place for tightening.
- 1-1/8" copper risers provide more flow capacity, constructed with Type K copper.
- All Ford Setters are assembled with lead-free solder.
- The directional angle ball valve shall be rated at 150 psi when used as a customer shut-off on the outlet side of the meter
- Double purpose union swivels will accommodate male iron pipe threads of flare copper

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

01/15/15

Submitted By: