


SUBMITTAL INFORMATION





FLANGED ANGLE KEY VALVE BY FLANGED ANGLE KEY VALVE WITH BYPASS (1-1/2" METER)

FEMALE IRON PIPE THREAD VERTICAL INLET AND OUTLET

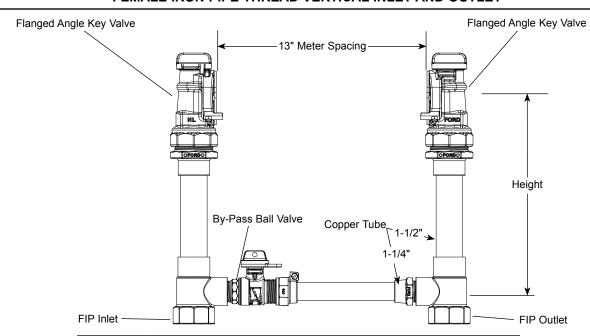

SERVICE LINE CONNECTION		HEIGHT	APPROX.	CATALOG NUMBER	√ SUBMITTED
FIP INLET	FIP OUTLET	HEIGHT	Wt. Lbs.	CAIALOG NUMBER	ITEM(S)
1-1/2"	1-1/2"	12"	27.3	VV86-12B-11-66-NL	
		15"	28.0	VV86-15B-11-66-NL	
		18"	29.0	VV86-18B-11-66-NL	
		21"	30.0	VV86-21B-11-66-NL	
		24"	31.0	VV86-24B-11-66-NL	
		27"	32.0	VV86-27B-11-66-NL	

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

Note: The flange inverted key angle valves should not be used as a customer shut-off on the customer side of the meter.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- · Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Copper conforms to ASTM B75 or B88, UNS C12200
- All Ford® Setters are assembled with lead-free solder
- · Bracing eyes are standard
- Meter support brackets are standard
- · Padlock wing is standard on all angle meter ball valves or key valves
- · Drop-in rubber gaskets are included with all meter flanges
- Optional High By-Pass add "HB" following the height. Example VV86-12HB-11-66-NL

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167 www.fordmeterbox.com

01/14/22

Submitted By
